


Feature

- ✓ 8*10/100Mbps PoE ports, 2*10/100/1000Mbps uplink port,1*1000M SFP combo;
- ✓ Support IEEE802.3af/at;
- ✓ Support restrain network storm, VLAN function;
- ✓ Support Max Transmission distance up to 250m with PoE Power;
- ✓ All port supported by MDI/MDIX auto flip and self-negotiation;
- ✓ Built-in power supply;
- ✓ Maximum power of single PoE port: 30W;
- ✓ Maximum PoE power: 120W;
- ✓ Adopts store-and-forward architecture;
- ✓ Fanless, natural cooling, small,compact and quiet design, suitable for desktop or wall;
- ✓ Support lightning protection 6000V;

Technical Data sheet

Power Adapter Voltage		AC 110V-240V
Consumption		120W(52V 2.3A)
Network Port	PoE Ethernet Port	1-8 port:10/100Mbps
	Ethernet Port	Uplink port:10/100/1000Mbps
	SFP port	SFP port:1000Mbps
Transmission Distance	100Mbps:0-100m/10Mbps:0-250m	
	Uplink Port:0-100m	
	SFP:dependson the optical module(20km~100km)	
Transmission Medium		Cat5/5e/6 standard network cable
Network Standard		IEEE802.3/802.3u,IEEE802.3x,IEEE802.3ab
Switching Capacity		5.6Gbps
Packet Buffer Memory		1Mbits
Throughput		4.1664Mbps
MAC Table		2K
Packet Forwarding rate		10Mbps:14880pps/port
		100Mbps:148800pps/port
		1000Mbps:1488000pps/port
PoE Standard		IEEE802.3af/at
PoE Power Supply		End-Span(1/2 +;3/6 -)
PoE Power		af=15.4w at=30w
Port Function		Power priority mechanism,fast and forward, MAC automatic learning and aging IEEE802.3X Full-duplex and mode and backpressure for Half-duplex mode
LED Indicator		LINK/ACT.100Mbps;PoE Status Indicator; Power indicator;Extender
Working temperature		0℃~55℃
Relative Humidity		20-95%
Storage temperature		-20℃~70℃
Dimension(L*W*H)		202mm*140mm*45mm
Color		Black
Weight		1.05kg

Diagram

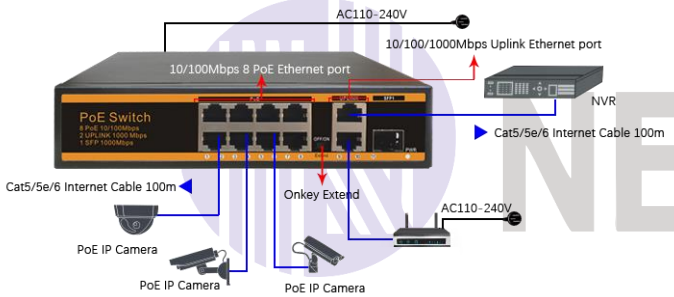

Dimensions

